


Installation Guide (For BKT-550)

BKT-550

Important Notes:


All Plasma / LCD TV brackets are thoroughly inspected and fully tested operational in factory.
We accept no liability whatsoever for any losses due to improper operation, or any unauthorized alternation.
All trademarks contained in this installation guide are the property of their respective owners.

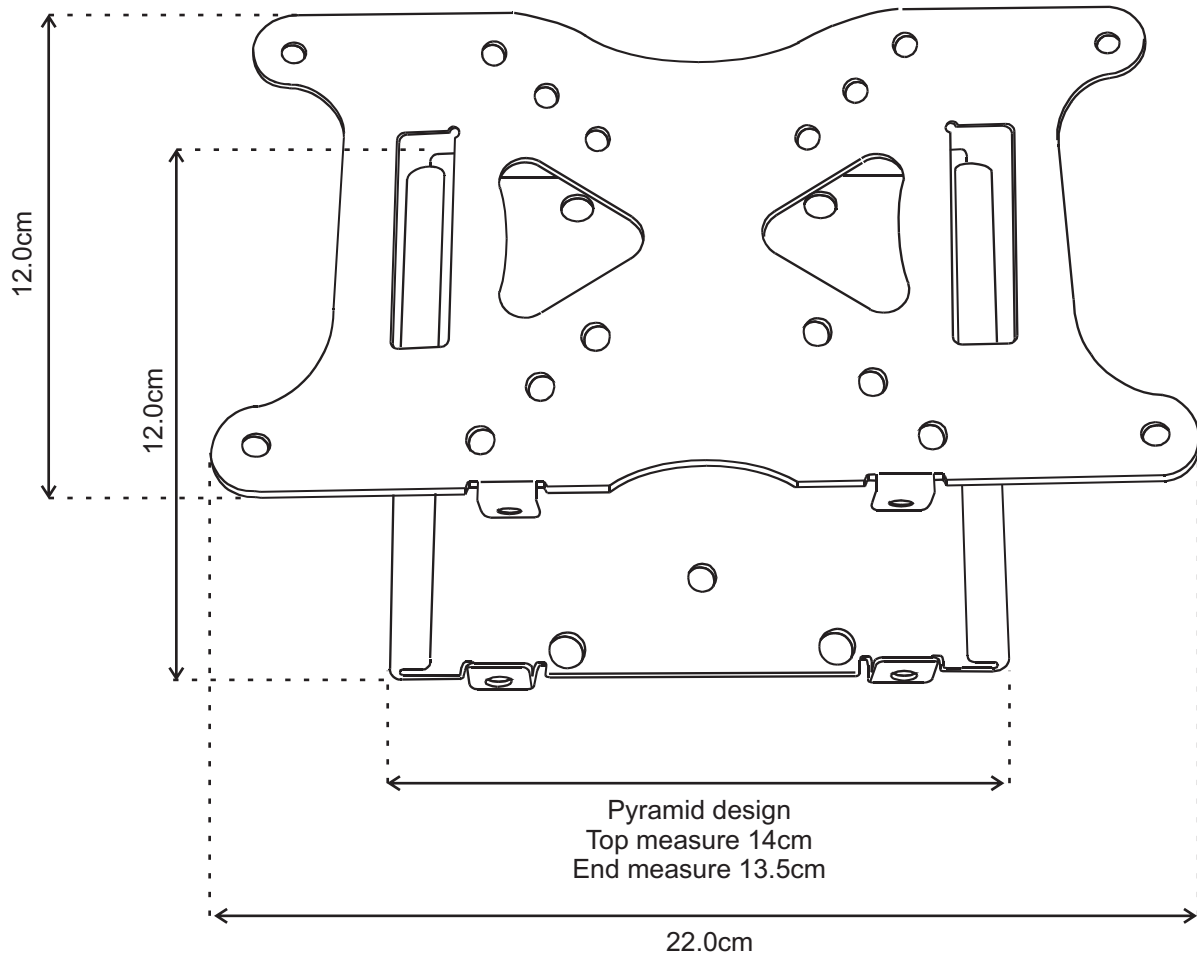

Mounting Screws for mounting universal arm to Plasma / LCD TV:


- M5 x10 Safety Pan Head Screw (2 nos.)
- M4 x 8 Pan Head Screw (4 nos.)
- M4 x12 Pan Head Screw (4 nos.)
- M5 x 8 Pan Head Screw (4 nos.)
- M5 x12 Pan Head Screw (4 nos.)
- M5 washer (6 nos.)
- M6 washer (4 nos.)
- Dry Wall Screw (2 nos.)
- Dry Wall Anchor (2 nos.)

STEP 1

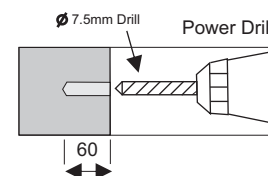

- A) Drill Dia 7.5mm Holes to a depth 60mm.
(Note: Do not drill too deep)

STEP 2

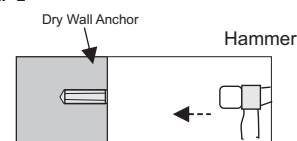

- B) Insert Dry Wall Anchor into the hole.
C) Screw Dry Wall Screw in after placing the wall plate